

KINGLIFT

SCISSOR LIFTS


DOUBLE EXPANSION SERIES



HIGHLIGHTS

High Performance

- ▶ The pedal extension platform can be quickly rolled out to the operating point.
- ▶ The foldable fence reduces the volume of the whole machine.
- ▶ Convenient for working in tight spaces.
- ▶ 25% climbing ability, able to smoothly climb up the slope.
- ▶ Swivel chassis for easy maintenance.
- ▶ Fault codes are automatically displayed for easy maintenance.

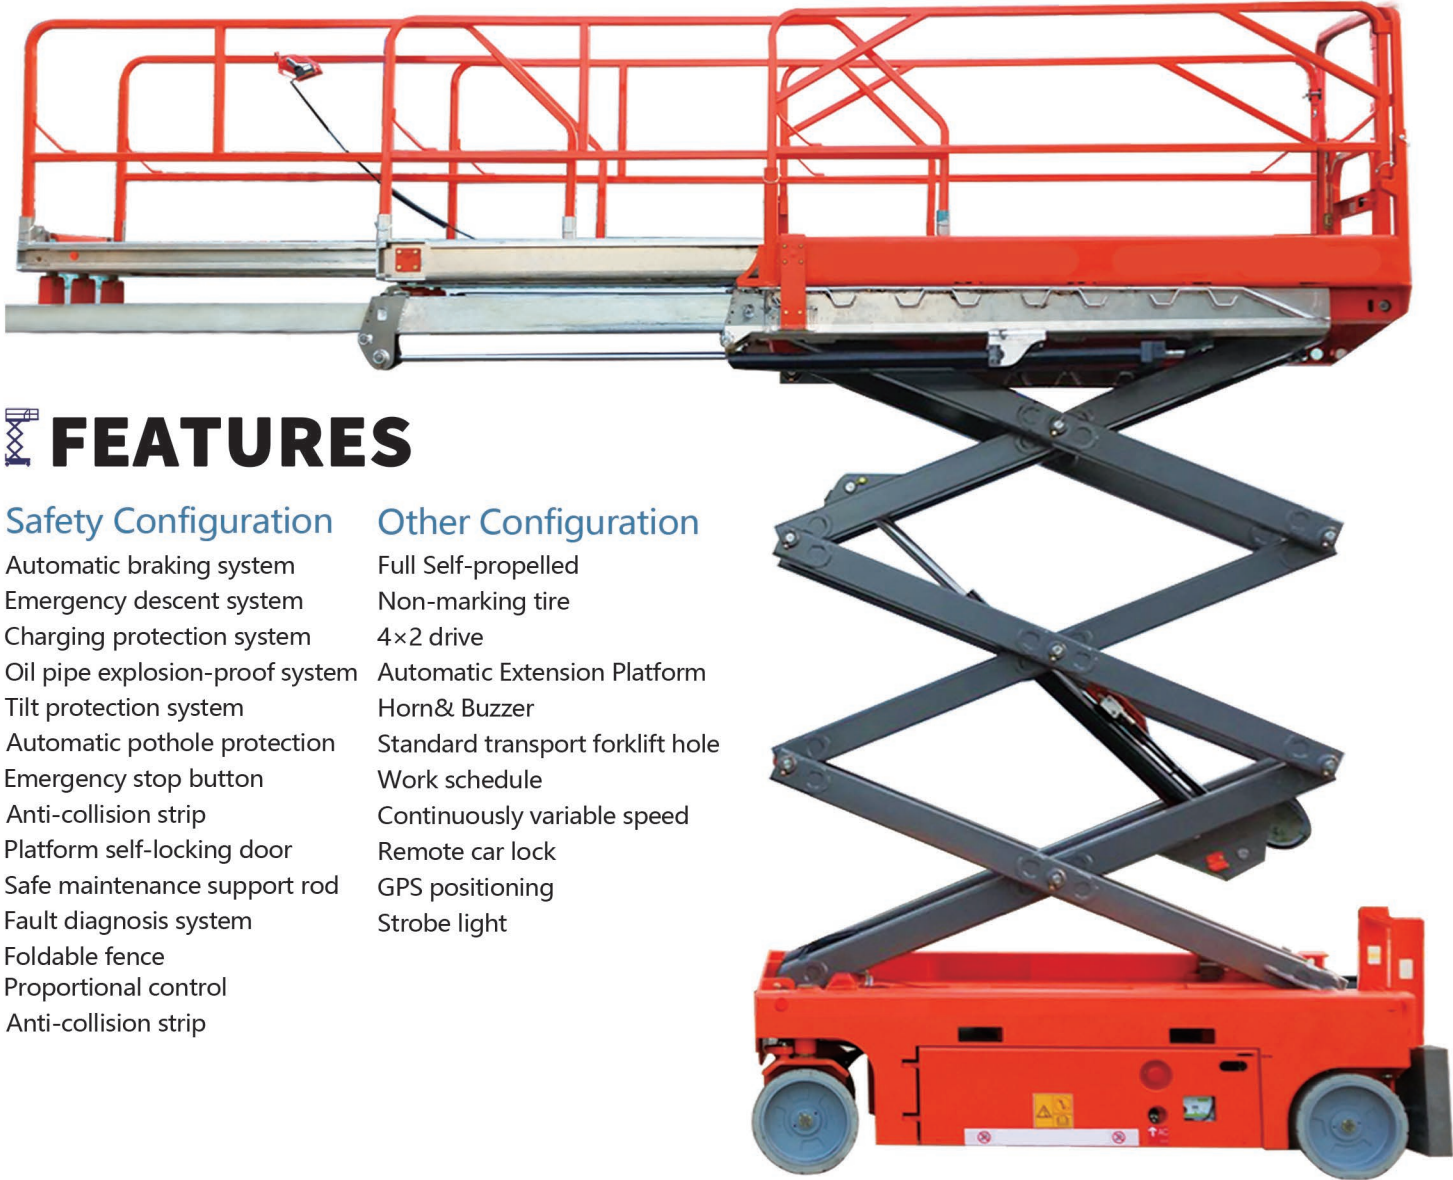

FEATURES

Safety Configuration

- Automatic braking system
- Emergency descent system
- Charging protection system
- Oil pipe explosion-proof system
- Tilt protection system
- Automatic pothole protection
- Emergency stop button
- Anti-collision strip
- Platform self-locking door
- Safe maintenance support rod
- Fault diagnosis system
- Foldable fence
- Proportional control
- Anti-collision strip

Other Configuration

- Full Self-propelled
- Non-marking tire
- 4×2 drive
- Automatic Extension Platform
- Horn& Buzzer
- Standard transport forklift hole
- Work schedule
- Continuously variable speed
- Remote car lock
- GPS positioning
- Strobe light

www.kingliftcn.com

CE EAC TUV ISO CCC IPAF

DETAILED PARAMETERS OF KINGLIFT

SCISSOR LIFT DOUBLE EXPANSION SERIES

Model	QYDZ04T	QYDZ06T
Size		
Working Height	5.8m	7.80m
A-Platform Height-Elevated	3.80m	5.80m
B-Platform Height-Stowed	1.1m	1.1m
C-Platform Length	2.29m	2.29m
D-Platform Width	1.13m	1.13m
Platform Extension	2.8m	2.8m
E-Overall Height (unfolded guardrail)	2.19m	2.19m
Overall height (folded guardrail)	1.68m	1.68m
F-Overall Length	2.48m	2.48m
G-Overall Width	1.19m	1.19m
H-Wheelbase	1.89m	1.89m
I-Ground Clearance (Stowed)	0.1m	0.1m
J-Ground Clearance (Raised)	0.02m	0.02m
Performance		
Capacity of Extension	150kg	120kg
Platform Capacity	550kg	450kg
Max. Number of Workers	7	6
Driving Speed (Stowed)	3.5km/h	3.5km/h
Driving Speed (Raised)	0.8km/h	0.8km/h
Turning Radius (Outside)	2.2m	2.2m
Turning Radius (Inside)	0m	0m
Lifting Speed	3-5m/min	3-5m/min
Gradeability	0.25	0.25
Max. Working Angle	1.5°/3°	2°/3°
Tire(Drive Wheel)	Φ381×127mm	Φ381×127mm
Power		
Battery	4×6V/200ah	4×6V/200ah
Charger	24V/30A	24V/30A
Weight		
Gross	2150kg	2260kg

