

KINGLIFT

MOBILE SCISSOR LIFT SERIES



- 

HIGHLIGHTS
- #### High Performance

 - ▶ Wide working table
 - ▶ High loading capacity
 - ▶ Many people can work at the same time
 - ▶ Use high-strength manganese steel structure
 - ▶ It is applicable to site, plant, station, airport, lifting equipment maintenance, field power facilities maintenance, steel frame structure plant maintenance, etc.

- 

FEATURES
- #### Detailed

Hydraulic hose: 2 - 10 - 43MPa double - layer steel mesh pipe
Guide rail: 5mm flat plate is bent to make the guide rail
Spraying treatment: use electrostatic powder spraying
Hydraulic oil: 32# Great Wall anti-wear hydraulic oil
Lifting speed: 4-6 m/min, adjustable falling speed
Shaft pin: made of 45# round steel, boiled black
Scissor rod: 120x80x3.75mm rectangular tube
Distribution box: some accessories are Delixi
Outrigger: 120x50x3.75mm rectangular tube
Chassis: 160x80x3.75mm rectangular tube
Rust removal: shot blasting, sand blasting
Control form: upper and lower control
Pumping station: Anshan Lisheng
Oil cylinder: HSG80/45 4 pieces
Power and voltage: 3kw/380V
Table: 3mm flat plate bending
Tires: 500-8/400-8 tires 4 pieces
Limit switch: Delixi

- #### Accessories & Options

Explosion-proof motor

Diesel and electricity

Trailer scissor fork

Mixed AC and DC

Folding outrigger

Auxiliary walking

Auxiliary+AC/DC

Telescopic table

Remote control

Warning lamp


Diesel engine

Hand pump

Eappliance

DC lifting

Solid tyre

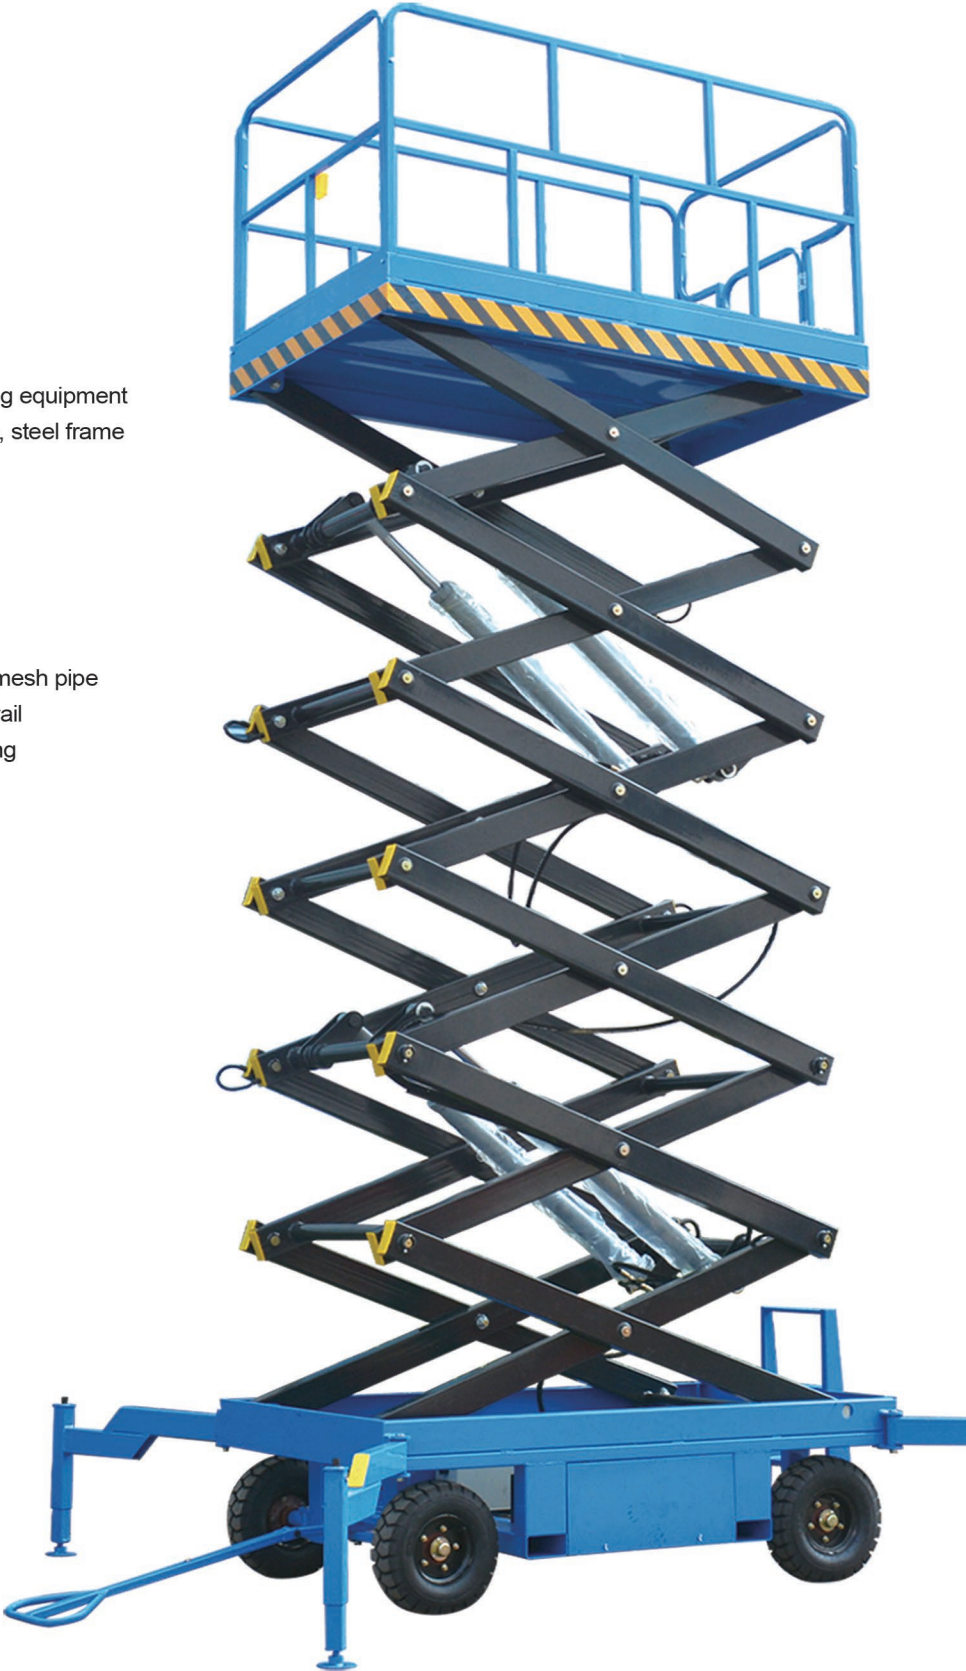

www.kingliftcn.com

CE | EAC | TUV | ISO | CCC | IPAF

DETAILED PARAMETERS OF KINGLIFT MOBILE SCISSOR LIFT

(Max loadcapacity is less than 1 ton)

Model	QYCY 0.5-4	QYCY 0.5-6	QYCY 0.5-7	QYCY 0.5-8	QYCY 0.5-9	QYCY 0.5-10	QYCY 0.3-11	QYCY 0.5-12	QYCY 0.5-14	QYCY 0.3-16	QYCY 0.3-18
Size											
Working Height	6m	8m	9m	10m	11m	11m	13m	14m	16m	18m	20m
A-Platform Height-Elevated	4m	6m	7m	8m	9m	10m	11m	12m	14m	16m	18m
B-Platform Height-Stowed	1.1m	1.2m	1.2m	1.38m	1.5m	1.53m	1.65m	1.75m	1.81m	2.08m	2.08m
C-Platform Length	2.1m	2.1m	2.1m	2.1m	2.1m	2.1m	2.1m	2.55m	2.812m	2.812m	3.07m
D-Platform Width	0.83m	0.83m	0.83m	0.83m	0.93m	1.23m	1.23m	1.53m	1.53m	1.6m	1.6m
E-Overall Height	2.2m	1.2m	1.2m	1.38m	1.5m	1.53m	1.65m	1.75m	1.81m	2.08m	2.08m
F-Overall Length	2.25m	2.25m	2.25m	2.25m	2.25m	2.25m	2.25m	2.796m	3.067m	3.067m	3.321m
G-Overall Width	0.95m	0.95m	0.95m	0.95m	1.06m	1.35m	1.35m	1.67m	1.73m	1.81m	1.81m
Performance											
Extension Platform Aavailable	×	×	×	×	×	×	×	×	×	×	×
Platform Capacity	500kg	500kg	500kg	500kg	500kg	500kg	300kg	500kg	500kg	300kg	300kg
Max. Number of Workers	6	6	6	6	6	6	4	6	6	4	4
Lifting Speed	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min	4-6 m/min
Tire(Drive Wheel)	400-8	400-8	400-8	400-8	400-8	400-8	400-8	400-8	400-8	400-8	400-8
Weight											
Gross	800kg	880kg	970kg	1050kg	1165kg	1360kg	1400kg	2260kg	2486kg	3063kg	3900kg

