

KINGLIFT DOCK LEVELER



www.kingliftcn.com

CE | ENEC | TUV | ISO | CCC | IPAF

DETAILED PARAMETERS OF KINGLIFT DOCK LEVELER

HIGHLIGHTS

High Performance

- ▶ The equipment adopts full hydraulic drive, easy to operate
- ▶ The equipment adopts a high-power motor and runs stably
- ▶ The equipment adopts sealed hydraulic cylinder to prevent oil leakage
- ▶ The countertop adopts anti-slip checkered plate, which is anti-slip and stable


FEATURES

Safety Configuration

Non-slip checkered board table
Anti puncture skirt
Self-adjusting device height

Other Configuration

high power motor
Sealed hydraulic cylinder
Full hydraulic drive

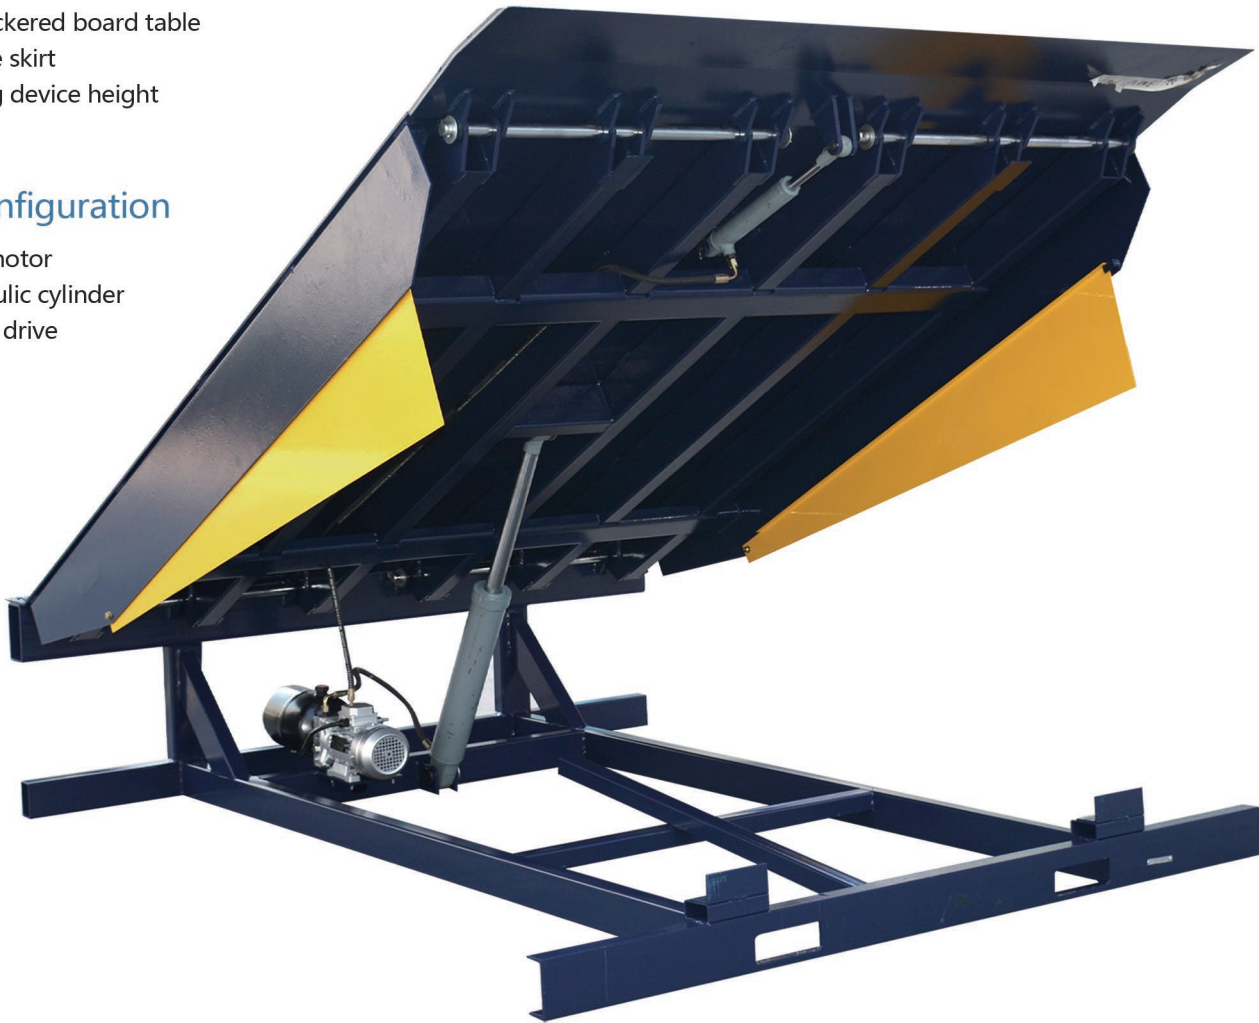

Model	QYDCQG6-0.6	QYDCQG8-0.6	QYDCQG10-0.6	QYDCQG10-0.6
Size				
A-Table length	2m			
B-Table Width	2.5m			
C-Tongue width	0.4m			
Upward tilt stroke	0.3m			
Downward stroke	0.2m			
Bottom pit length	2.08m			
Bottom pit width	2.54m			
Bottom pit height	0.6m			
Performance				
Loading Capacity	6T	8T	10T	12T

