

SUMEC INTERNATIONAL TECHNOLOGY COMPANY LIMITED

No.198 Changjiang Road, 210018
Nanjing, China

www.sumecflooring.com

Contact: Phil Jiang
Mobile: 0086 189-5166-2513
Email: jiangzhe@sumec.com.cn



Wechat



Whatsapp



BUILDING MATERIAL

FLOOR · WALL · ROOF



PRODUCT APPLICATIONS

The group designs, manufactures and promotes effective, quality and sustainable solutions for flooring, wall and complementary interior and exterior finishes.



Residence



Garden



Healthcare



Education



Sport



Business

SUMEC GLOBAL REPUTATION

- Customer-first while honesty and faith serve as the base
- Innovation, breakthrough, and long-term stability

12 Subsidiaries



28 Industrial Factories



16885 Global Employees



5th rank



In 2018, SUMEC Group Corporation ranked the 5th in the China Forbes Growth Champions List.

600710 stock code



In 2018, SUMEC Group Corporation went public in Shanghai Stock Exchange.

500 Fortune



In 2018, SUMEC Group Corporation ranked the 104th among the China Fortune 500.

5,400,000,000 USD



2024 annual export amount is USD 5.4 billion.

1978 Establishment



China Machinery and Equipment Export company Jiangsu Branch, the predecessor of SUMEC was found in 1978.

SUMEC-ITC



Floor & Wall sector is under Building Material Department of SUMEC International Technology Company Limited (SUMEC-ITC).

HOME FLOORING

SPC INTERLOCKING VINYL FLOORING

Exceptionally durable and easy to clean, 100% waterproof, and with wood, tile, cement and stone looks, it's as stylish as it is strong; It's a perfect choice for those wanting a durable beautiful floor with unrivaled value.

Thickness(mm): 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0 Installation Type: Float
 Wear Layer(mm): 0.2, 0.3, 0.4, 0.5 Construction: Multilayer SPC with realistic decorative film
 Wear Layer(mil): 8, 12, 15, 20 Surface Treatment: Hardwearing PU Protection

▶ SPC PLANK

126*1220mm (6*48")

180*1220mm (7*48")

230*1530mm (9*60")


230*1830mm (9*72")



▶ SPC TILE

305*610mm (12*24")


456*912mm (18*36")

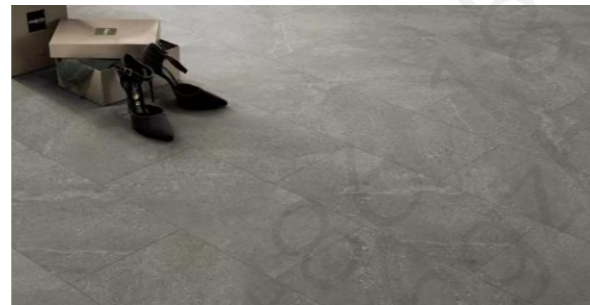

▶ SPC SMALL

127*635mm (5*25")

148*592mm
(5 4/5*23 1/5")

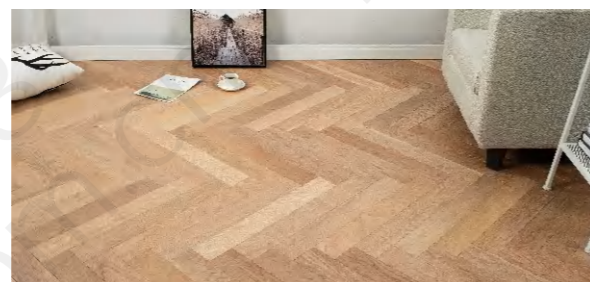


HOME FLOORING

SPC INTERLOCKING VINYL FLOORING

• ACOUSTIC

Acoustic backing can be prefabricated underlay the flooring for noise reduction and extra comfort. This 2 in 1 product also makes the installation easier.

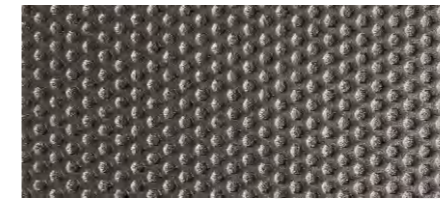

IXPE




EVA




Cork


• BEVEL

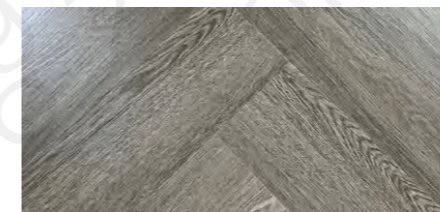

Micro Bevel: milling away part of the wear layer in a shallow angle to make a thin bevel effect

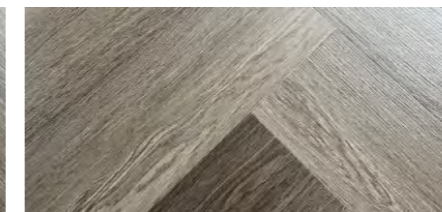


Wide Bevel: to incorporate the middle snit milling for tiles or herringbone simulations

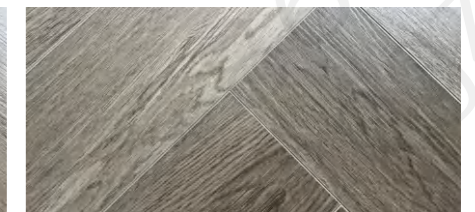


Painted Bevel: creating a subtle shadow line and a more realistic look

• MIX PATTERN


To enhance visual perception with diverse and rich empathetic power.

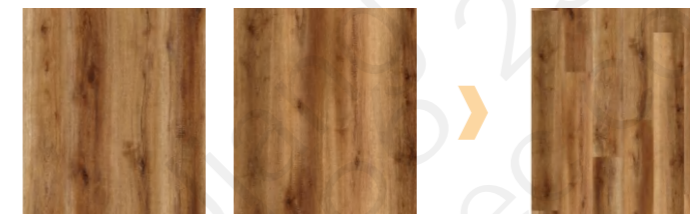


• INSTALLATION TYPES

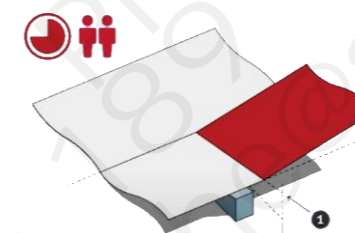

Type 1: Angle Angle



Type 2: Push Down

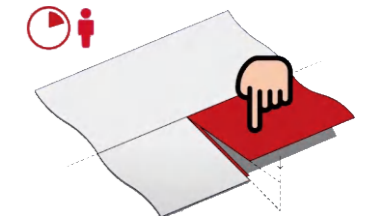

Type 3: Fold Down

HOME FLOORING

LVT GLUE VINYL FLOORING

This is an economical product that is easy to install and easy to DIY. Realistic designs to capture the essence of ceramic, marble, carpet and wood. This is a good choice for those who want to create a stylish and interior surface.

Thickness(mm): 1.0, 1.2, 1.3, 1.5, 2.0, 2.5
 Wear Layer(mm): 0.07, 0.1, 0.2, 0.3
 Wear Layer(mil): 3, 4, 8, 12

Installation Type: Glue
 Construction: Multilayer LVT with realistic decorative film
 Surface Treatment: Hardwearing PU Protection

▶ LVT PLANK

101.6*914.4mm (4*36")

152.4*914.4mm (6*36")

181.61*1219.2 mm (7.15*48")

228.6*1219.2 mm (9*48")



▶ LVT TILE

600*600mm

457*457mm
(18*18")

305*305mm
(12*12")




• Backing Type

Dry Back: Apply glue before laying the flooring
 Self Adhesive: With glue pre-applied on back; "peel and stick" at smooth and flat ground


• Recommend Floor Arrangement



Herringbone



Wood Strip



Brick Bond

HOME FLOORING


WPC OUTDOOR DECKING

WPC (wood plastic composite) decking is a special, eco-friendly alternative to wooden decking. WPC decking from Sumec comes in a range of colours and does not have the associated problems that natural wood decking does, such as: cracking, warping, slipping and expensive maintenance requirements.

▶ WPC DECKING CLASSIC



• surface options



• colour options



Classic decking with wide range of designs
 Profile: Solid, Square Whole, Round Whole

▶ WPC DECKING CO-EXTRUSION



• surface options



• colour options




• Enhanced co-extruded decking with better fastness & thermal stability
 • Profile: Solid, Square Whole, Round Whole



CONTRACT FLOORING

HOMOGENEOUS FLOORING


- ▶ High performance flexible vinyl sheet with mono-layer construction
- ▶ Ideal for health & care sector and education interior

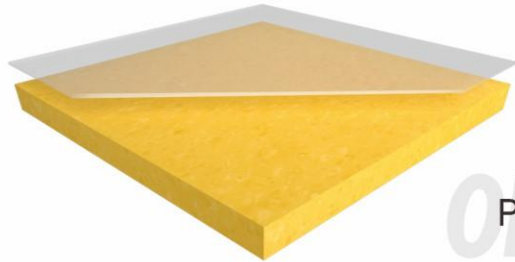

PUR Coating

Homogeneous Structure

- Highly indense homogeneous structure makes it 100% hygienic with no contamination or bacteria development.

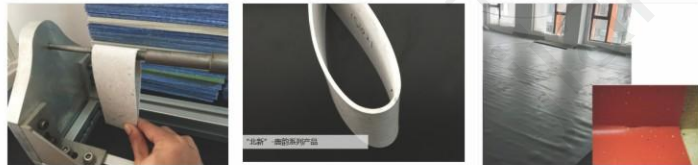

- Indense PUR surface protection brings 100% non-porous surface which is water-tight, stain resistant and with outstanding iodine repellent effect.


A cross-sectional display with a magnification of 100 times.





Sumec homogeneous sheet material

Other brands of sheet materials

- The vinyl sheet has good flexibility and works easily well on corner, pillar, turn and other complicated sites.

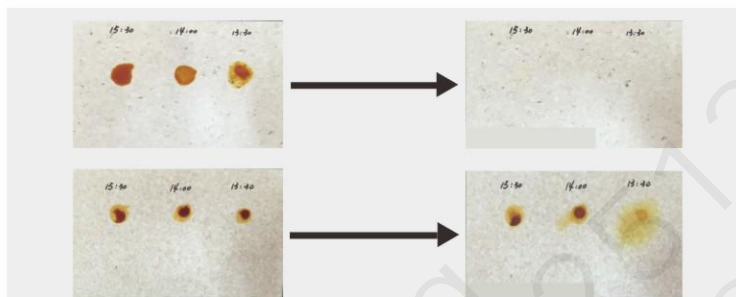

Sumec homogeneous products have extremely high density.

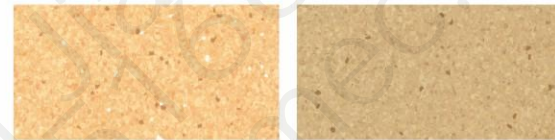

Memphis
24 colors

Sumoplex
24 colors



Inspiration
24 colors

Branden
44 colors



Serene
36 colors

Stuart
32 colors



Hygeia
24 colors

Dynasty
16 colors




CONTRACT FLOORING

ESD FLOORING

- ▶ To minimize or eliminate the risk of Electro Static Discharge (ESD) at source


• Electrostatic Homogeneous

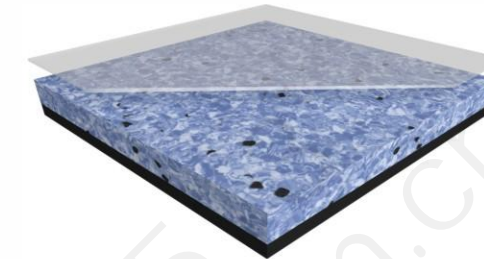

PUR Coating


Homogeneous Structure

Conductive backing





Static Conductive
24 colors

- With Permanent Electrostatic Conductive materials for better and long-lasting ESD protection
- Homogeneous structure with non-directional designs
- Acrylic Adhesive and Copper Strip are needed during installation

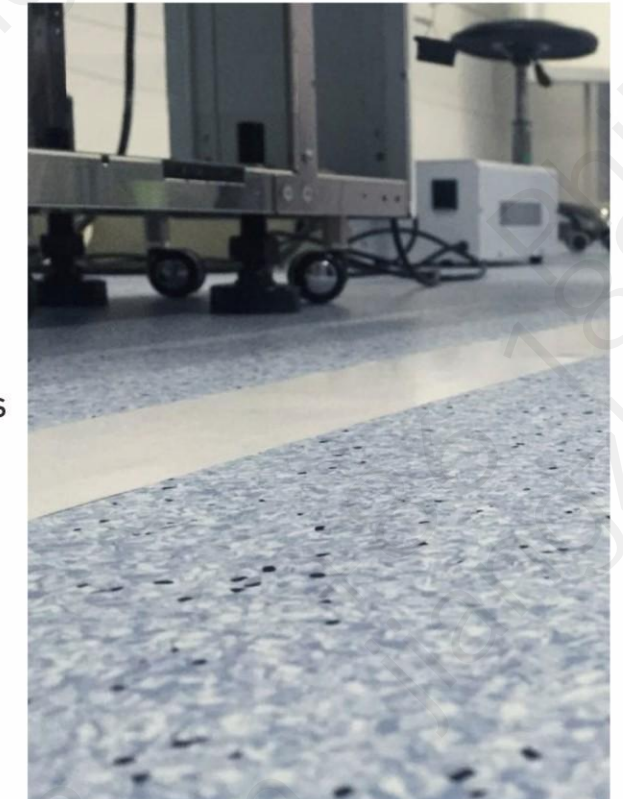

• Electrostatic Compact

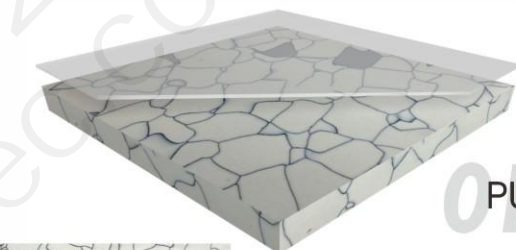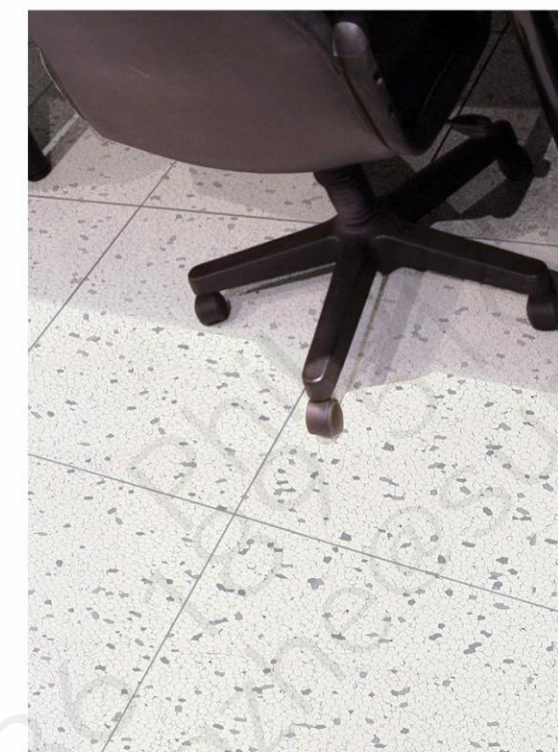

PUR Coating

Compact Structure With Carbon Fibres



ESD Tile
21 colours


- Compact tile with static resistance properties for static control
- Hot welding is recommended to create watertight surface

CONTRACT FLOORING



SAFETY FLOORING

► Specialist slip resistant vinyl safety flooring in various environments


·Transport Safety R10



- Dense concentration of deeply inlaid carborundum throughout the wear layer => Permanent antislip performance R10
- 0.6mm indense wear layer working well under heavy traffic
- Professional solution to commercial kitchen, bus, subway, caravan&RV, traffic center which have strict safety reuirements
- Eight contemporary dementla-friendly accredited colours for accessible bathroom, care room, locker room, etc.

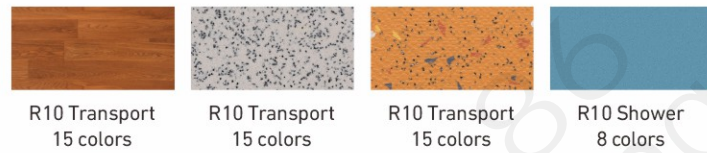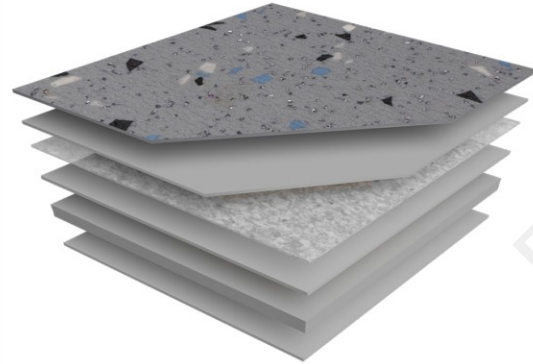

·Ultra Safety R12



- Dense concentration of deeply inlaid mineral crystal particles throughout the wear layer => Enhanced antislip performance R12
- Outstanding flexibity working well at complicate sites




CONTRACT FLOORING


HETEROGENEOUS COMPACT FLOORING





- Distinctive, high indention resistance sheet vinyl floor coverings in a multi-layer construction.
- Providing a broad range of engaging and innovative pattern finishes and colour options, the design possibilities are endless.

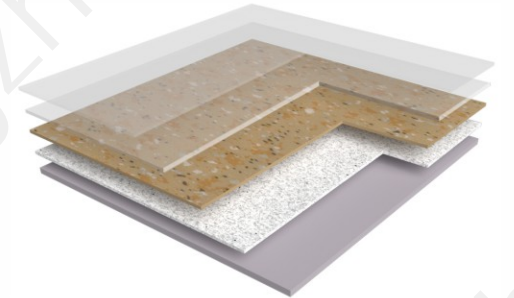


HETEROGENEOUS CUSHION FLOORING



- Cushion bottom providing shock absorption and comfortable stepfeel.
- Ideal for kindergarten, dance room, care house, etc.

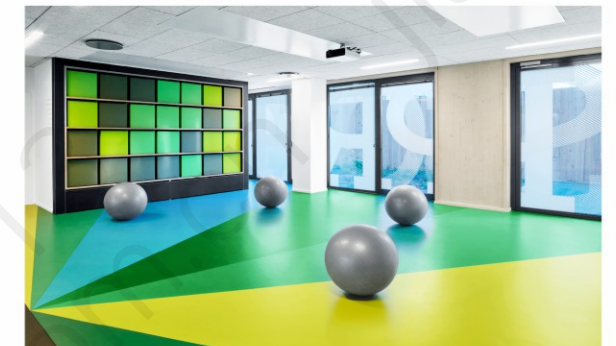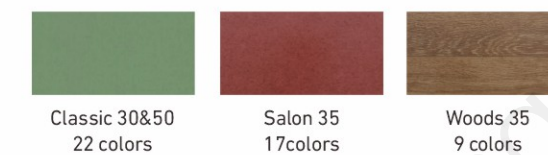

WALL COVERING



- 1 mm homogeneous structure providing 100% hygenic environment from floor to wall; ideal for hospital, laboratory and clean workshop.
- 1.2mm multi-layer structure giving a broad range of pattern and colour options ; easy to make seamless corner.




CONTRACT FLOORING

INTERLOCKING FLOOR TILE


▶ PVC Industrial Tile




- Ideal for high traffic areas, such as garage, workshop, factory, warehouse, etc.
- Adhesive free innovation; easy to install, remove and reuse
- No business downtime; use immediately after installation
- Only minimum subfloor preparation is required;
- Weight is 5600g/m², 6400g/m² and 7200g/m² for 5mm, 6mm and 7mm tile; available in 6 colours x 3 embosses.

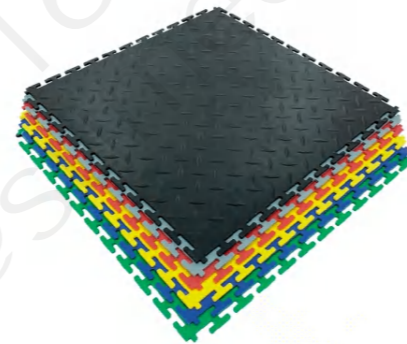


· Colour options

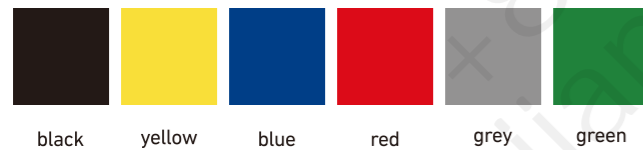

· Emboss Options

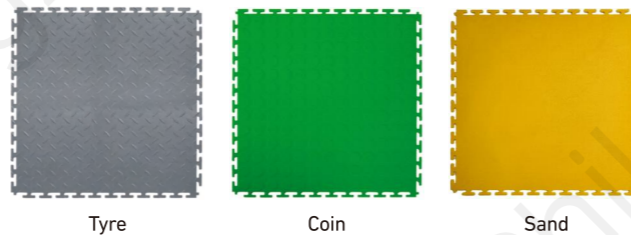

· Accessories

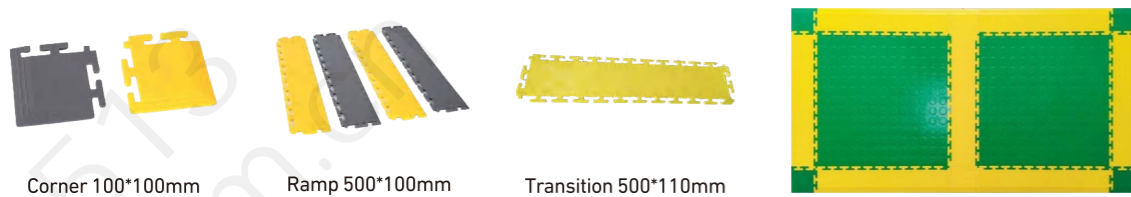


CONTRACT FLOORING

INTERLOCKING FLOOR TILE

▶ Puzzle Tile



- Adhesive-free and aesthetic floor tile for high traffic commercial place: supermarket, workshop, studio, etc.
- Highly durable and wear resistant; 34-43 classification use area
- R9, R10 slip resistance level
- Easy and fast to install upon either concrete or old floor covering
- No business downtime; use immediately after installation
- Designer friendly, 200+ designs and colours for option

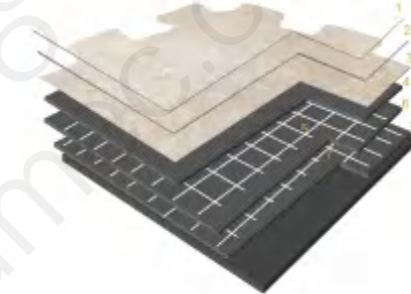

PUR Coating

100% PVC Transparent Wear layer

Print Film

LVT Bottom Layer - Reinforced by Double Fibreglass Grid

2,3 can be replaced by 2mm Homogeneous Flooring


· Emboss Options



Six Dovetails

Ten Dovetails

Thirteen Dovetails

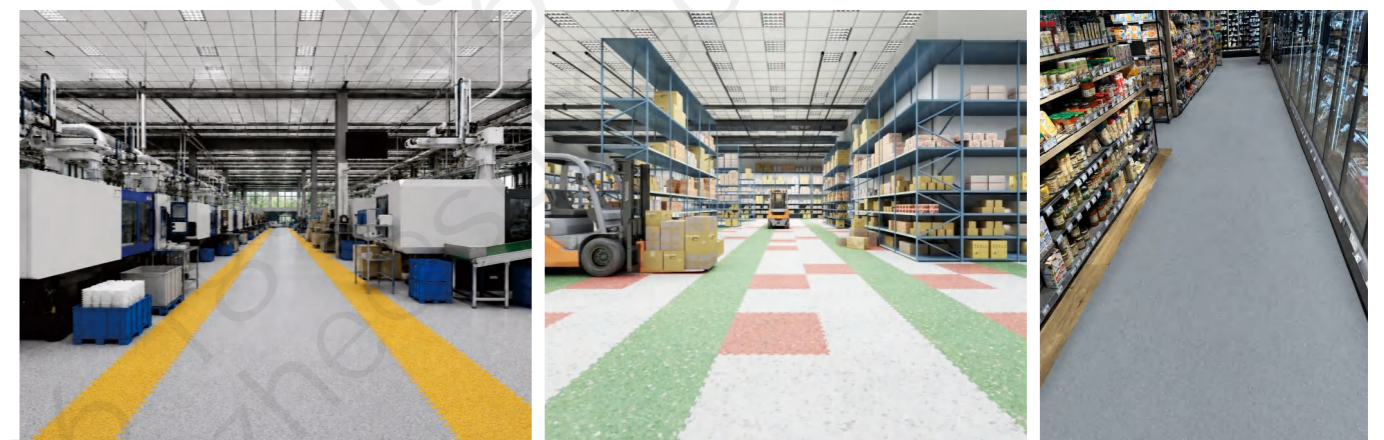


SPORT FLOORING

SPECIFIC INDOOR SPORTS FLOORING

► SUMOFLEX BADMINTON


- Design for sports centre, school, and other amateur badminton practice

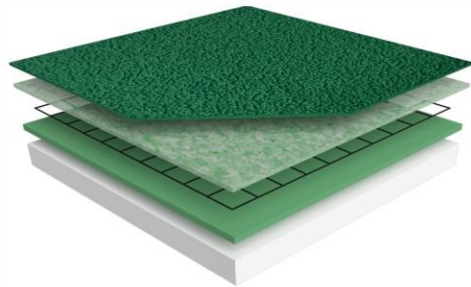

- Highly performing flooring with good durability and scratch resistance




- Design for world games and championships

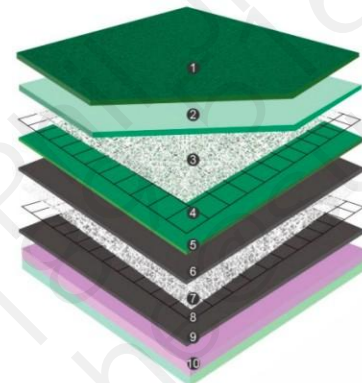


73081





98281



- The ultimate in player comfort, protection and perfect footing
- Sand embossment specially designed for characteristics of badminton

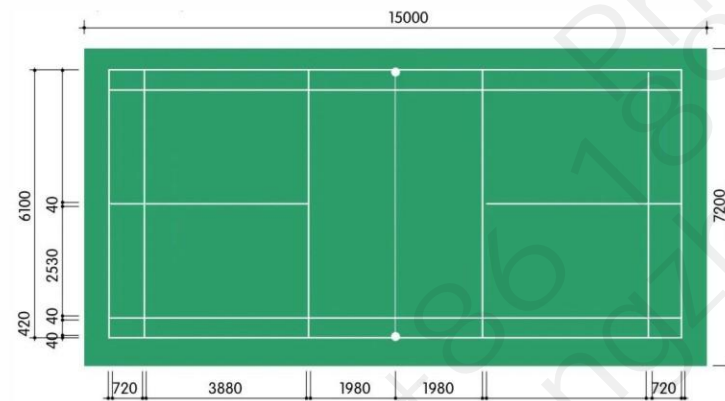

► SUMOFLEX TABLE TENNIS

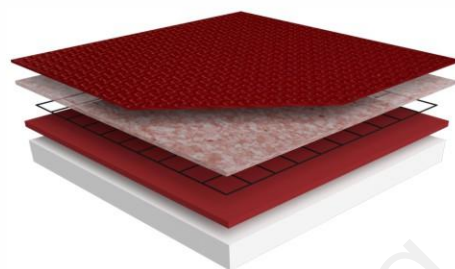

18313



58313





- Surface and colour specially engineered for table tennis sport

SPORT FLOORING

MULTIPURPOSE INDOOR SPORTS FLOORING

► SPORT COMFORT

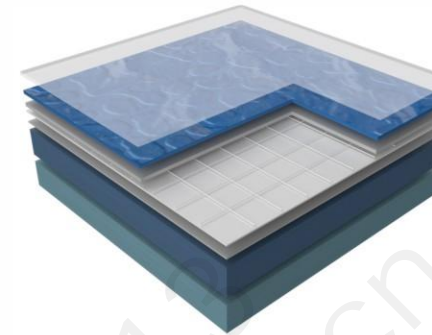

- Maximum comfort and safety, suited to all levels and all sports for all users
- Can customise thickness and roll length

PUR Coating

Fiberglass Grid

100% PVC Wear Layer

Non-calcium Foaming



6134



6135



6136



6146



6183




6420




6430



6431



6445



6570



6758



6759



88010



88015



88017



88018




88019



88020

► GEM SPORT

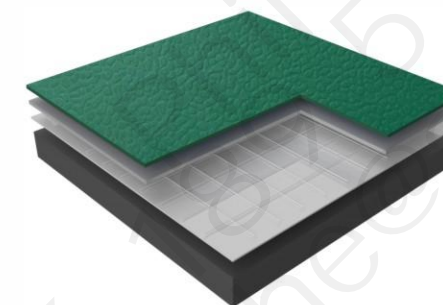

- Budget choice bringing sports joy to more people.



68020



68021




68022



68023



68025



68030




68080

SPORT FLOORING

MULTIPURPOSE INDOOR SPORTS FLOORING

► SUMOFLEX SPORT S 70

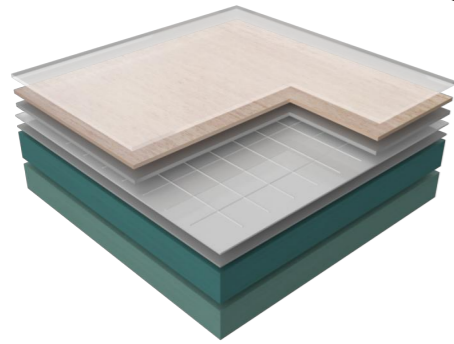

1.8m WIDTH | 15m LENGTH | 7mm THICK

· Good durability and very high indentation resistance which welcome both sports and non-sports activities



► SUMOFLEX ACTION 45

1.8m WIDTH | 20m LENGTH | 4.5mm THICK


· Highly performing recreational flooring with better durability than the other 4.5mm competitors



SPORT FLOORING

MULTIPURPOSE INDOOR SPORTS FLOORING

► SUMOFLEX SPORT SURFACE

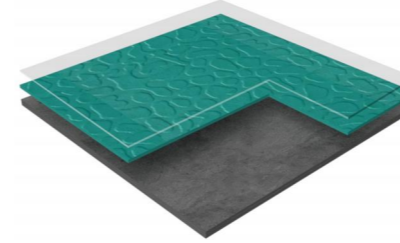

1.8m WIDTH | 20m LENGTH | 2.0mm THICK

· Ideal for rolling sports and heavy duty multipurpose usage




► PICKLEBALL FLOOR MAT

1.83m WIDTH | 18.3m LENGTH | 3.5mm THICK

- Used indoor and semi-outdoor
- Standard roll size customised for professional pickleball court
- Portable installation allowed, suitable for temporary activities
- 6 trending designs; qualified for both daily exercise and championship



· colour options

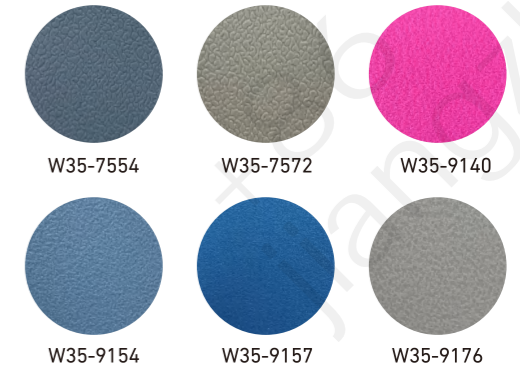

► DIGITAL PRINT FLOORING

≤ 1.6/1.8/2.0m WIDTH | ≤ 25m LENGTH | 2.0/4.5/6.0mm THICK

- Use digital print ink to replace colour film to realise more design possibilities
- Format can be either tile or sheet
- 1.33m roll width available upon order for mosque pray room
- Application includes: lift cabin, kids playground, fitness room, gym, sport court, etc.

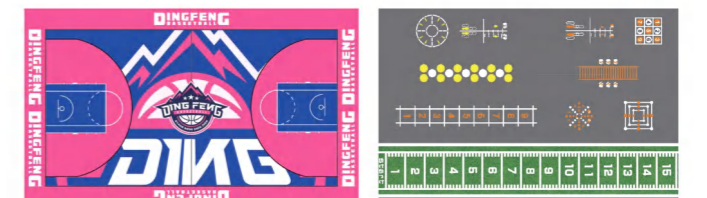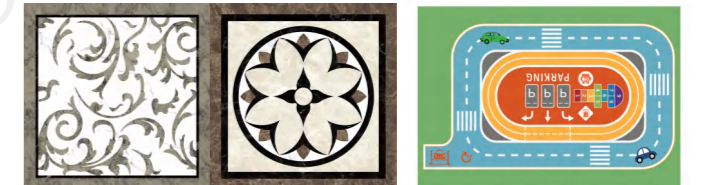

WALL PANEL & MORE

INTERIOR WPC WALL PANEL

▶ WPC WALL PANEL

WPC wall panel is made from two different materials: Wood Fiber and High Density Polyethylene, making the product durable, providing a good degree of weather and dirt resistance. WPC panels can be embossed or textured during producing to enhance their visual appeal and mimic natural materials like wood grain. This texture not only adds to the authenticity of the panels, but also provides a tactile experience which can enhance the overall ambiance of a space.


Advantages over traditional wood wall panel

Sustainable	Recycled wood fibers and plastic make it contribute to building green life.
Durable	WPC has over 20 years' service life, can resist blunt force and scratches.
Moisture Resistant	Wood powder and plastic make WPC waterproof and suitable for varieties of scenarios and climates.
Maintenance	WPC is very easy to install and maintain, making it a low cost for usage.



▶ ACOUSTIC WALL PANEL

Size(mm): 21*600*2400
 Structure: Polyester + MDF
 Surface: PVC Film; Natural Veneer

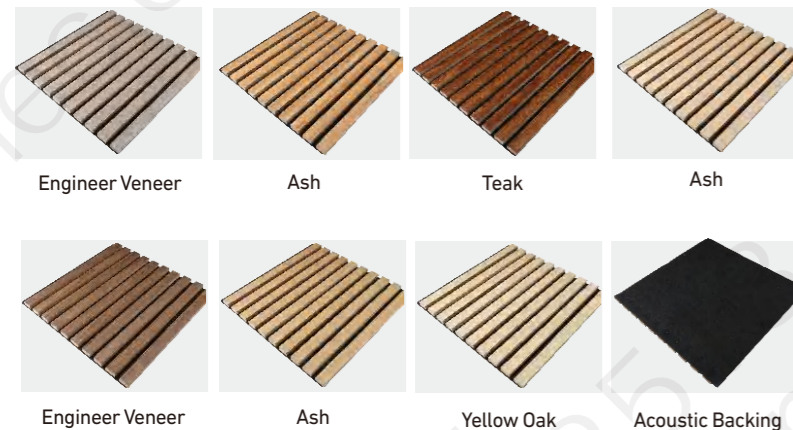


WALL PANEL & MORE

UVMARBLE SHEET


▶ INTRODUCTION

UV Marble Sheet is a wall covering sheet with high glassy marble outlook; The material is rigid, but also has great flexibility to fit arch surfaces. It's highly customised at low MOQ per SKU, which brings it an ideal choice for interior design.

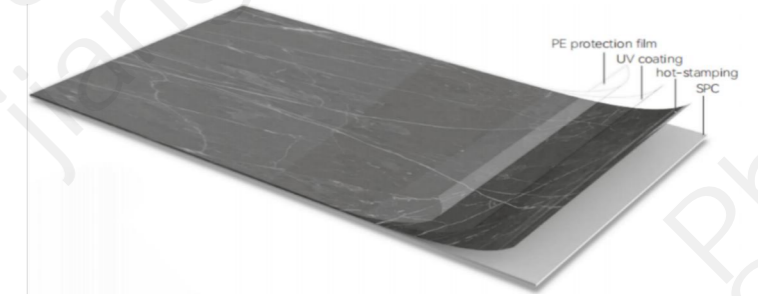

Material	PVC+Calcium powder+ Additive	Cerificates	Fire retardant grade:B1
Size	1220*2440MM, 1220*2800MM 1220*2800MM	Density	2000kg/m3
Thickness	2.5, 2.8, 3.0MM	Installation	Glue

▶ DESIGN

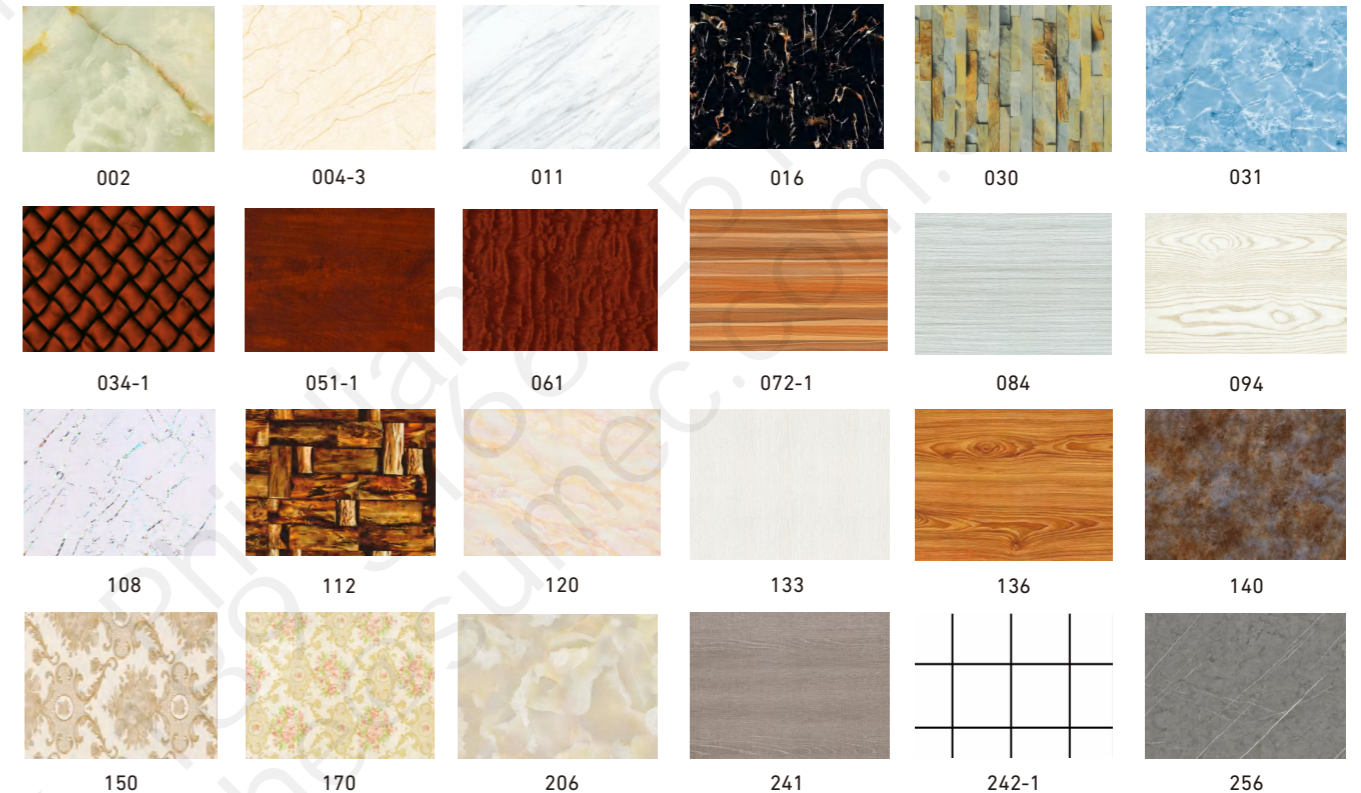

WALL PANEL & MORE

PVC WALL PANEL&CEILING


▶ INTRODUCTION

They are designed to provide all the functionality of conventional drop ceiling tiles at a fraction of the weight. The feather-light construction makes them a breeze to install, easy to clean, stain resistant, water resistant, dust free, and eco friendly! Installation is fast and couldn't be any easier. Also can be used as wall cladding.

Type	long continuous strip/ square
Surface	printing/ hot stamping/lamination
Width	60mm,100mm,200mm, 250mm,300mm,400mm,600mm
Thickness	4mm,5mm,6mm,7mm, 8mm, 8.5mm,9mm
Pvc content	35%,40%,45%,50%, 55%



▶ DESIGN

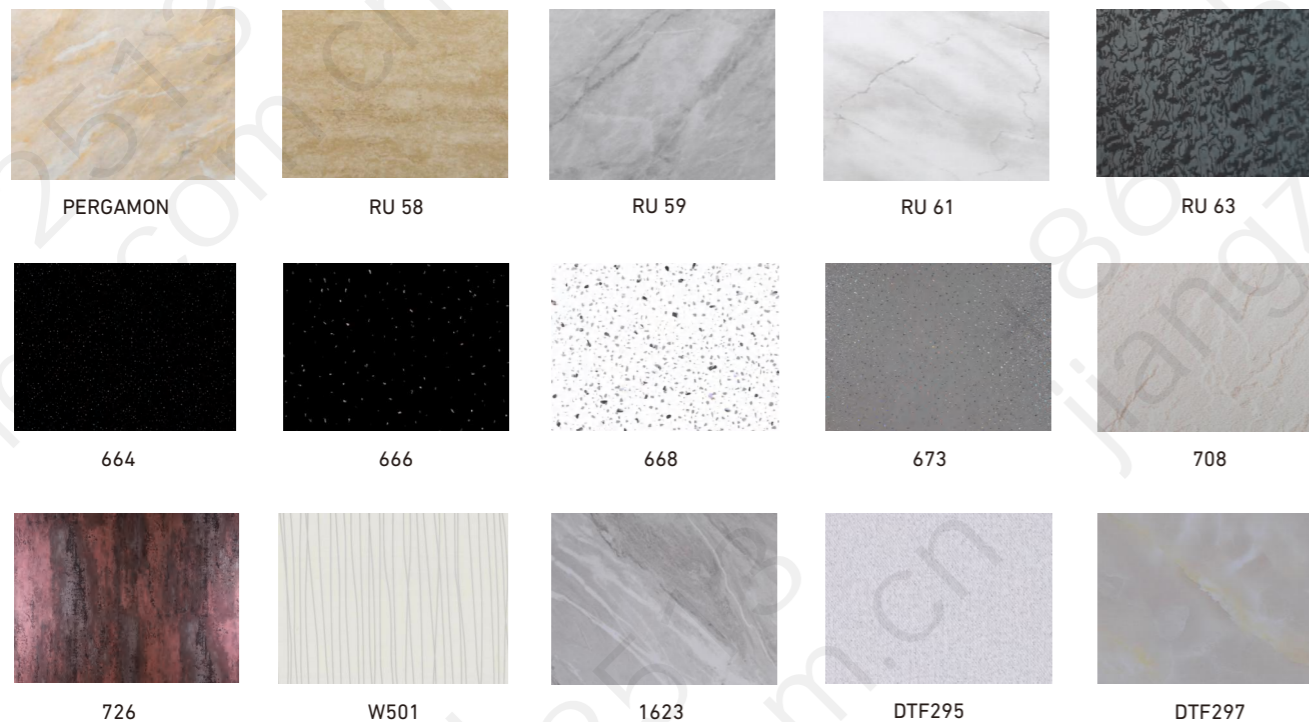

WALL PANEL & MORE

PU STONE PANEL

▶ INTRODUCTION

PU Stone Panel is a new type of lightweight, easy-installation faux stone panel, with the abilities of fireproof and waterproof. It starts from the form of a traditional stone veneer pattern. Later, due to the diversity of business needs and usage scenarios, it has been developed and promoted to a new style, called 'Mushroom Stone'. Its super easy installation and lightweight features allow you to update your home decor at a low cost, much easier than using traditional real stone veneers, and it provides a more realistic appearance that is superior to some other plastic types of artificial stone. Compare to other plastic types of faux stone, the realistic appearance also makes it the best choice.

Material	PU(Polyurethane)+Additive	Cerificates	Fire retardant grade:B1
Size	600*1200MM, 750*1500MM 300/400/600/800*2400MM	Density	1200kg/m3
Thickness	12-100MM	Application	Interior&Exterior wall

▶ DESIGN



WALL PANEL & MORE

EXTERIOR WPC WALL

▶ WPC WALL CLADDING

• Classic: 148H21, 152H13, 219H26, 177H28, 219H26, 206H20



• Surface Options:




• Colour Options:




• Co-extrusion: 128H25, 219H26, 89H50, 156H21

• Surface Options:





• Colour Options:



▶ WPC FENCE

• Co-extrusion: 180H20, 180H20, 90H20

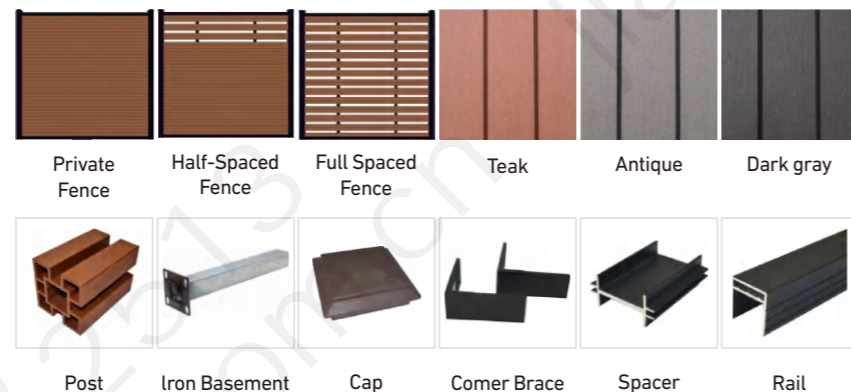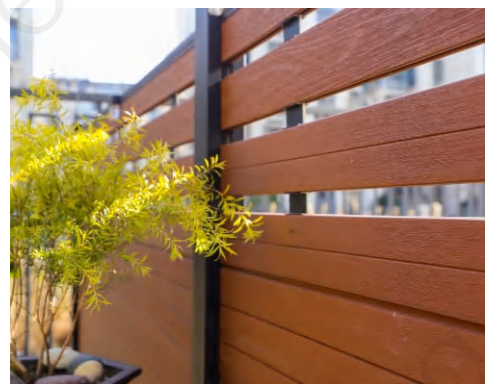

WALL PANEL & MORE

MCM SOFT STONE

▶ INTRODUCTION

Soft stone products are made from modified inorganic mineral powder and shaped using a temperature-controlled molding system. This flexible decorative material is eco-friendly, with a pollution-free, zero-emission production process, and recyclable materials. It is a new energy-saving, low-carbon building material with great market potential and environmental benefits.

The product is lightweight, thin, and flexible, with aging resistance, A-grade fire resistance, rich colors, breathability, and water resistance. Its strong adhesive ensures a secure bond, making it ideal for various decoration projects.

Material	Modified inorganic mineral powder
Size	300*300mm, 300*600mm, 600*1200 mm
Color	White, Creamy-white, Beige, Light Grey, Dark Grey, Black.
Applicable scenarios	storefronts, residential villas, business spaces, industrial park



▶ DESIGN



INTRODUCTION


Metal sidings (metal curve wall panels) have the characteristics of thermal insulation, waterproofing, flame retardancy, lightweight and earthquake resistance, easy installation, sound insulation, and noise reduction. They are also environmentally friendly, aesthetically pleasing, and durable. The panels are assembled using a simple and practical method that is not affected by seasonal environmental conditions, making installation and use very safe. They are convenient and suitable for all seasons.




- (1) Surface material :
The high quality metal plate after the special coating and embossed finish pressing treatment
- (2) Core material :
Rigid high-density PU foam thermal insulation layer with fire-retardant treatment
- (3) Bottom side material :
Foil protective layer with the function of insulation and moisture proof

DESIGN

Natural Wood

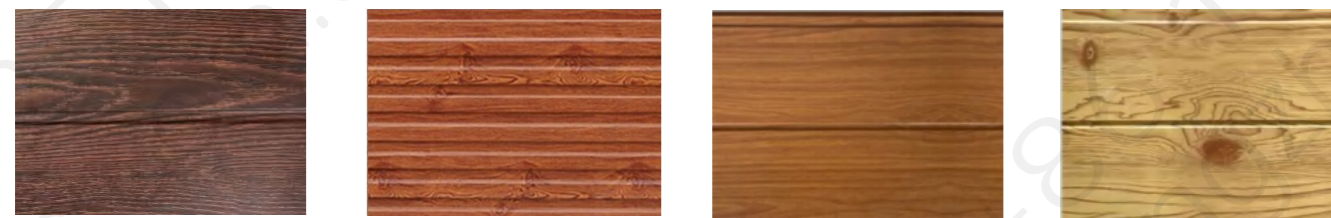


Classic Brick

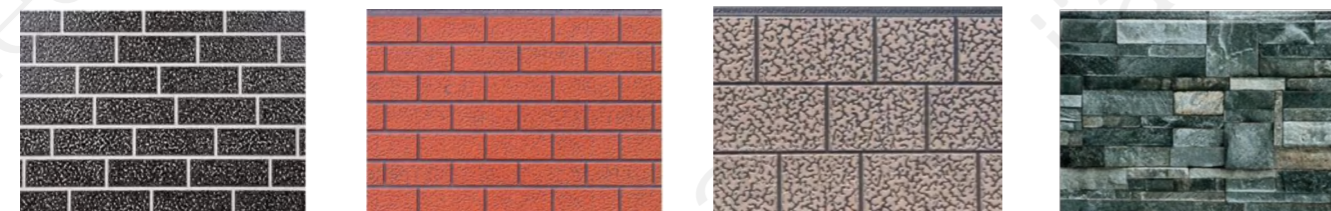

Others



STONE-COATED STEEL ROOF

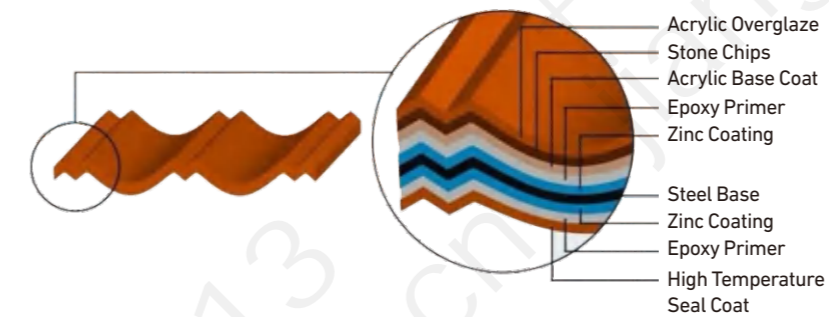

Project Cases:




Specifications:

 BOND Size:1340x420mm Coverage:1290x370mm	 SHINGLE Size:1340x420mm Coverage:1290x370mm	 MILANO Size:1340x420mm Coverage:1290x370mm	 SHAKE Size:1340x420mm Coverage:1290x370mm	 CLASSIC Size:1340x420mm Coverage:1290x370mm	 ROMAN Size:1300x420mm Coverage:1250x370mm
 OGOLAN Size:1340x420mm Coverage:1250x370mm	 HERITAGE Size:1340x420mm Coverage:1290x370mm	 OINTERLOCK SHINGLE Size:1348x365mm Coverage:1290x315mm	 OINTERLOCK SHAKE Size:1348x440mm Coverage:1275x375mm	 LONG SPAN BOND Size:920x2340mm Coverage:828x2270mm	 CORRAGATED Size:920x2340mm Coverage:840x2270mm

SYNTHETIC RESIN ROOF TILE

ASA Resin Roof Tile

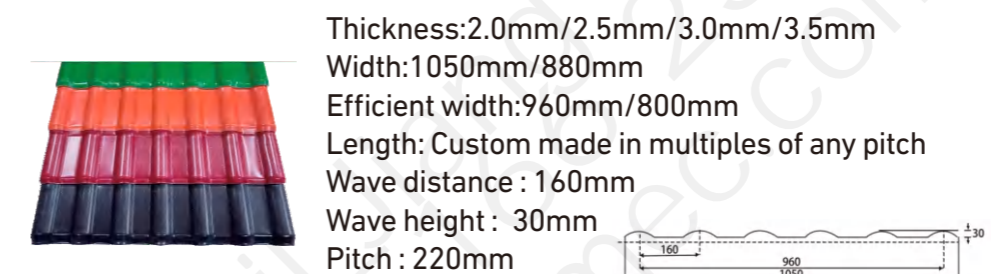

FRP Daylight Roof Tile

Materials: Premium Resin + High Performance Membrane + Fiberglass
Mould: 840, 980
Weight(g/m²): 1800, 2400, 2750, 3050
Thickness(mm): 1.2, 1.5, 1.8, 2.0
Temperature Range(°C): -50 - 130
Transmittance: 85%, 75%, 60%

